



 Step on Floors

HICKORY

Luxe Series

EIR (EMBOSSSED IN REGISTER)



Hickory Almond



Hickory Greige



Hickory Honey



Hickory Ice



Hickory Latte



Hickory Pecan



Hickory Sand



Hickory Almond



Hickory Latte



Hickory Greige



Hickory Honey



Hickory Ice



Hickory Sand



Hickory Pecan

LUXE SERIES

22,8x152,4

SPC is a Stone Polymer Composite made up of a precise extruded rigid core, acoustic backing (optional), and a top wear layer and UV protection.




- Fire-Proof
- Water Proof
- VOC-Free
- High Strength
- Zero Shrinkage
- Anti Slipping
- Sound Proof
- Anti Bacterial
- Easy Installation

PACKING DETAILS:

| PACKING LIST - 27 Tons - Maximum (SQM/KGS & Inches/Lbs) | | | | | | | | | | | | | | | | |
|---|------------|-----------|-------------|------|--------|------|-------|--------|-----------|--------|--------|---------|-----------|---------|---------|----------|
| Size | | Piece | | | Box | | | Pallet | | | | | Container | | | |
| Inches | Length(mm) | Width(mm) | Weight (Kg) | Sqm | Pieces | Sqm | Kgs | Boxes | Box layer | Layers | Sqm | Kgs | Boxes | Pallets | Sqm | Kgs |
| 9X60 | 1524.00 | 228.00 | 2.95 | 0.35 | 6.00 | 2.08 | 18.20 | 64 | 4 | 16 | 133.43 | 1204.80 | 1344 | 21 | 2802.01 | 25300.80 |


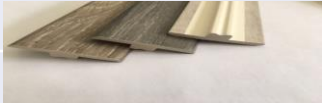


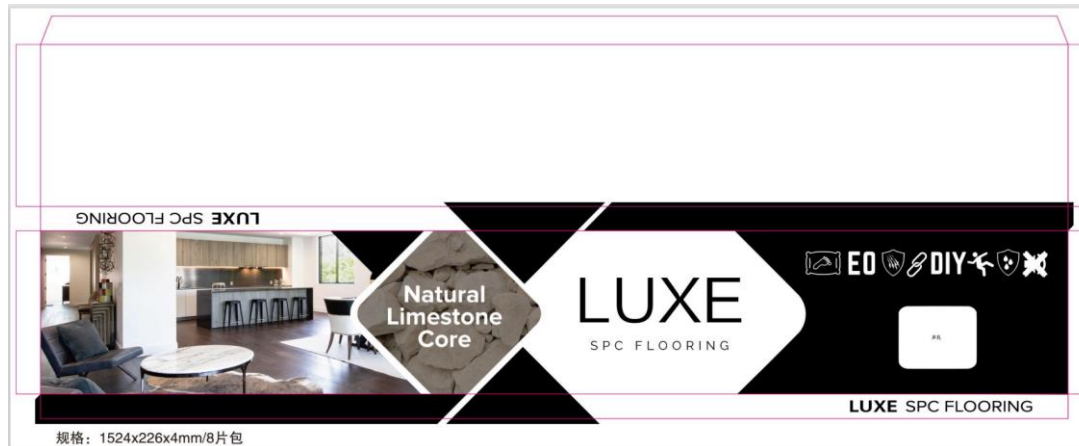

| Size | | Piece | | | Box | | | Pallet | | | | | Container | | | |
|--------|------------|-----------|-------------|------|--------|-------|-------|--------|-----------|--------|---------|---------|-----------|---------|----------|----------|
| Inches | Length(mm) | Width(mm) | Weight (Kg) | Sqft | Pieces | Sqft | Lbs | Boxes | Box layer | Layers | Sqft | Lbs | Boxes | Pallets | Sqft | Lbs |
| 9X60 | 1524.00 | 228.00 | 2.95 | 3.75 | 6.00 | 22.44 | 40.04 | 64 | 4 | 16 | 1436.16 | 2650.56 | 1344 | 21 | 30159.36 | 55660.00 |

BOX DETAILS:



TECHICAL DATA SHEET:

| Wearlayer | | 0.5mm | Product Thickness | 4mm+1.5mm EVA |
|----------------|-----------------------|---|--|---|
| Locking System | | Valinge | Size | 7*48/9*48/9*60* |
| No. | Test Item | Test Method | Requirement | Result |
| 1 | length(mm) | EN427 | ±0.15 | 1220mm±0.10 |
| 2 | Width(mm) | | ±0.15 | 182mm±0.10 |
| 3 | Squareness(mm) | | ≤0.30 | ≤0.15 |
| 4 | Straightness(mm) | | ≤0.25 | ≤0.15 |
| 5 | Gapping(mm) | | ≤0.20 | ≤0.10 |
| 6 | Thickness(mm) | EN427 | | ≥4.0 product : +0.05-0.10 |
| 7 | Shrinkage% | EN434 80°C/6H | ≤0.12% | product : lengthwise≤0.08 widthwise≤0.06 |
| | | | | product : lengthwise≤0.07 widthwise≤0.05 |
| 8 | Curling% | EN434 80°C/6H | ≤1.0mm | 0.10mm 0.25mm 0.20mm 0.20mm |
| | | | | 0.10mm 0.30mm 0.15mm 0.20mm |
| 9 | Peel Strength (N/5cm) | EN431 | ≥2.8kgf/2.0cm | 3.20kgf/2.0cm |
| 10 | Scratch Streght(g) | / | | ≥2800 |
| 11 | Wearing Capacity(g) | EN-660-2 | | ≤0.015 |
| 12 | IIC | ASTM E989-02 (2012) | | 51 |
| | STC | ASTM E90-09 | | 50 |
| 13 | Reaction to fire | ASTM 648E 19a | Critical Radiant flux 0.81 W/ cm2 | Class 1 |
| 14 | Abrasion Resistnace | EN 13329:2016 +A1:2017 | ≥4000 revolutions | AC4 |
| 15 | DCOF | ANSI A326.3-2021: | BOT3000E | DRY= 0.76 / WET=0.44 |
| 16 | Formaldehyde Emission | EN 14041:2004/AC:2006 & EN717-1:2004 | E1:≤0.124mg/m³ | Not Detected |
| 17 | Pentachlorophenol | EN14041:2004 ANNEX B & EN12673:1999 | | Not Detected |
| 18 | Residual indentation | ASTM F1914-17 | Load the diameter: 6.35±0.0127mm | 0.1mm |
| | | | Total load: 34.2±0.340kgs | |
| | | | Indentation Time: 15min | |
| 19 | Thermal Conductivity | EN 14041:2004/AC:2006 & EN12667:2001 | 0.09±0.005w/(m-K) | 0.089w/(m-K) |
| 20 | Watertightness | EN 14041:2004/AC:2006 & Annex A EN 13553:2017 | Testing time: 24h | Pass |
| 21 | Wear resistance | NALFA LF 01-2019 | Load:500g/wheel(Total 1000g) | Average:5000r |
| | | | Abrasive paper:S-42(P180) | |
| 22 | Thermal Conductivity | EN 14041:2004/AC:2006 & EN12667:2001 | 0.09±0.005w/(m-K) | 0.089w/(m-K) |

| PROFILE | PICTURE |
|---|--|
|  <p data-bbox="633 358 844 387">T-molding</p> |  |
|  <p data-bbox="651 494 826 524">Reducer</p> |  |
|  <p data-bbox="626 628 880 658">Flush Stairnose</p> |  |

***Moldings (Trims) available
For shape reference only***