



Step on Floors

EARTH

(Random Emboss)



Arena



Ash



Coffee



Desert



Snow


Colors | Colores



Arena



Ash

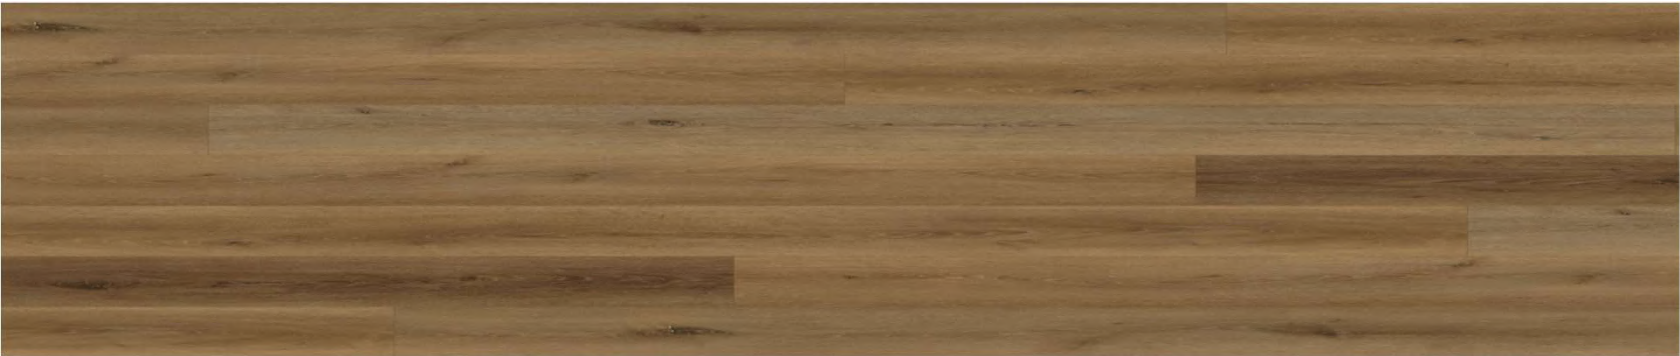

Coffee




Desert



Snow

What is LVT?

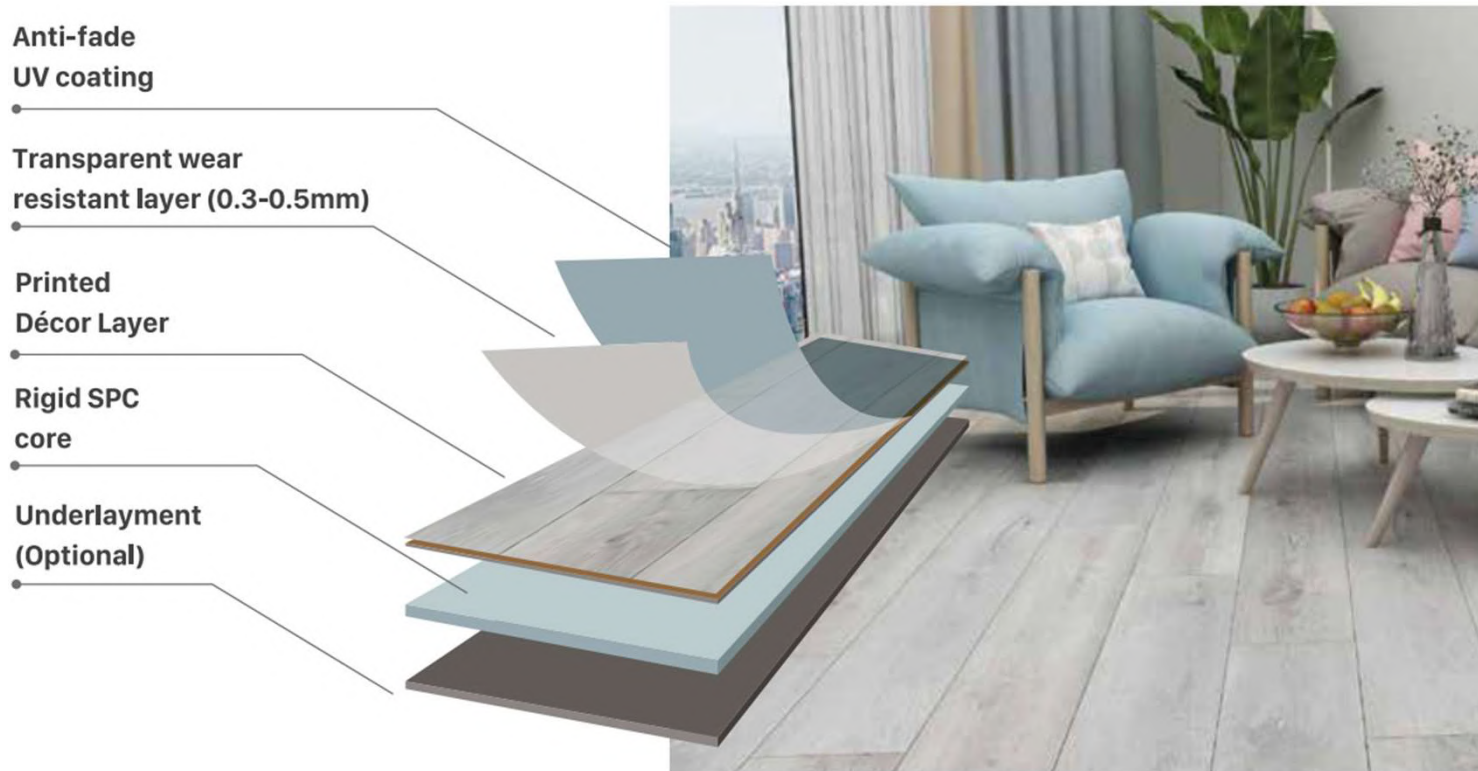


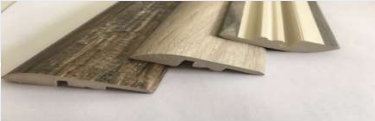

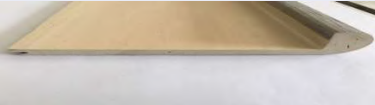
LVT is a Luxury Vinyl Tile made up of a precise extruded rigid core, acoustic backing, a printed décor film and a top wear layer and UV protection.



TECHICAL DATA SHEET: _____

EARTH

LVT 4/0.3 + 1.5 EVA underlayment			
No.	Properties	Classification / Standard	Result
Product Specifications			
1	Size		7" x 48"
2	Built in Underlayment		1.5 mm EVA
3	Total Thickness		5.5 mm
4	Wear Layer		0.3 mm (12 mil)
5	Locking System		UNILIN
6	Installation Method	Click Installation	Uniclic
7	Surface Treatment		UV Coating
8	Staining Resistance	ISO26987	Not affected
9	Resistance to Light	ASTMF1515	<8.0 ΔE
10	DCOF	ASTM D2047	DRY - 0.48
11	Thickness Swell	ASTM F3261	Commercial Class
12	Large Ball Impact Resistance	EN 16511	≥1200 mm
13	Heat Stability / Color Fastness	ASTMF1514-03	<8.0 ΔE
14	Critical Radiant Flux	EN 13501-1	Class Bfl - s1
15	Residual Indentation	ASTM F3261	Commercial Class
16	Surface Bonding	ASTM F3261	Commercial Class
17	Thermal resistance	EN 12667:2001	0.05 (m ² .K)/W
18	Dimensional Stability	ASTM F3261	Commercial Class
19	Impact Sound Conduction	ASTME492-09/ ISO 12354	IIC= 64 dB
20	Airborne Sound Conduction	ASTME90-09	STC = 66dB
21	Static Load Limit	ASTM F970-07	Commercial Class

PROFILE	PICTURE
 <p data-bbox="730 483 982 516">T-molding</p>	
 <p data-bbox="751 641 940 673">Reducer</p>	
 <p data-bbox="720 792 1024 824">Flush Stairnose</p>	

*Moldings (Trims) available
For shape reference only*