



 Step on Floors

**SOLID**

**EIR (EMBOSSSED IN REGISTER)**



**Brick**



**Iron**



**Concrete**



**Wood**



**Brick**



**Iron**



**Concrete**




**Wood**

152.4x23.0

## What is LVT?

---

LVT is a Luxury Vinyl Tile made up of a precise extruded rigid core, acoustic backing, a printed décor film and a top wear layer and UV protection.

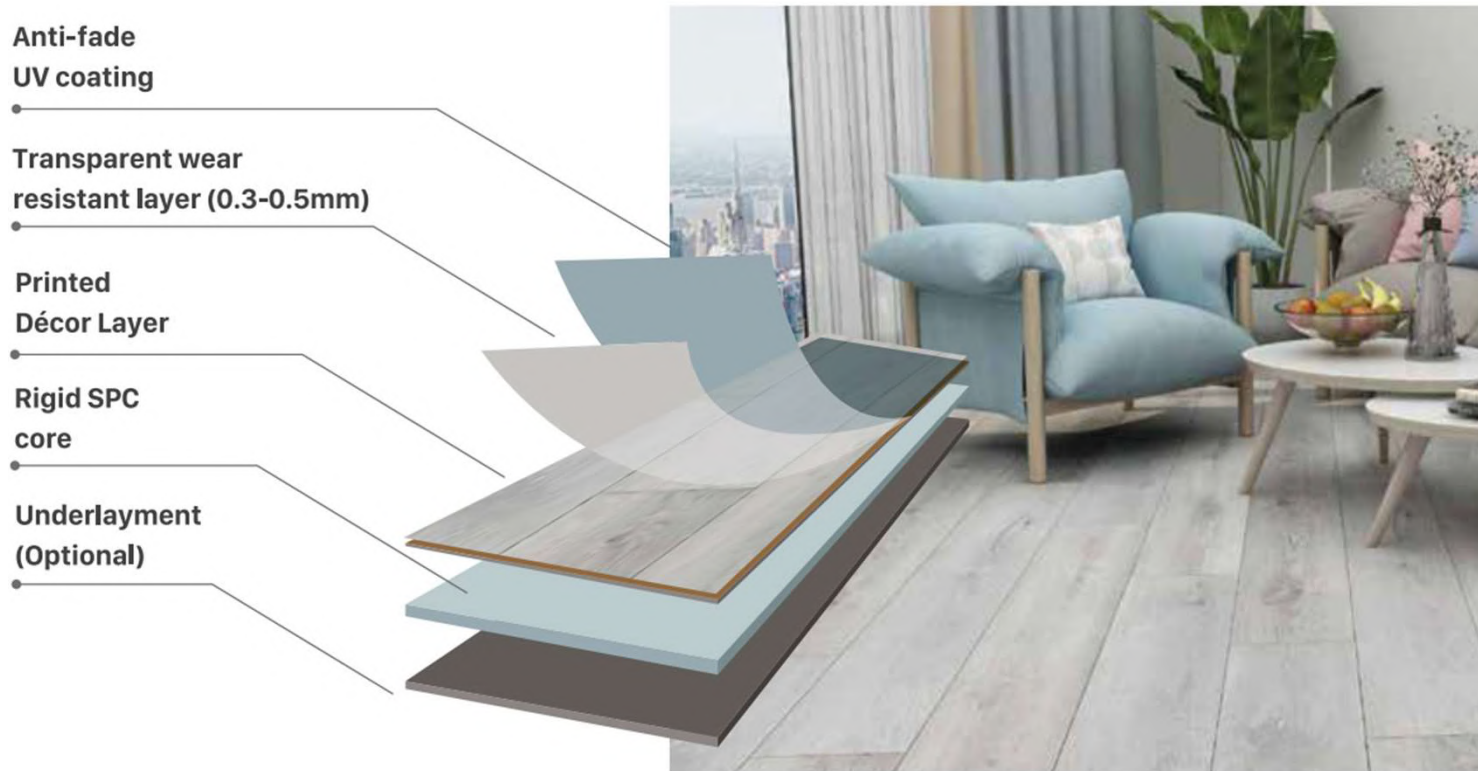

# PACKING DETAILS:

PACKING LIST - 27 Tons - Maximum (SQM and KGS)																		
Size	Piece						Box			Pallet					Container			
Inches	Length(mm)	Width(mm)	Thickness (mm)	Weight (Kg)	Core + Pad	Sqm	Pieces	Sqm	Kgs	Boxes	Box layer	Layers	Sqm	Kgs	Boxes	Pallets	Sqm	Kgs
9X60	1524	230	7.5	4.38	6.0mm + 1.5mmEVA	0.35	6	2.10	26.58	48	4	12	100.95	1315.84	960	20	2019.00	26316.80

PACKING LIST - 59,400 Lbs - Maximum (SQFT and LBS)																		
Size	Piece						Box			Pallet					Container			
Inches	Length(mm)	Width(mm)	Thickness (mm)	Weight (Lbs)	Core + Pad	Sqft	Pieces	Sqft	Lbs	Boxes	Box layer	Layers	Sqft	Lbs	Boxes	Pallets	Sqft	Lbs
9X60	1524	230	7.5	9.64	6.0mm + 1.5mmEVA	3.77	6	22.64	58.48	48	4	12	1086.61	2814.85	960	20	21732.28	56296.96

# BOX DETAILS:

**INSTALLATION INSTRUCTIONS**

Our vinyl flooring is recommended with the patented Click-Lock system. This system allows for a fast and easy installation of the flooring. The flooring is designed to be installed over a variety of substrates. The flooring is designed to be installed over a variety of substrates. The flooring is designed to be installed over a variety of substrates. The flooring is designed to be installed over a variety of substrates.

**PREPARING THE SUBSTRATE**

The substrate must be clean, dry, and free of any loose particles. The substrate must be clean, dry, and free of any loose particles. The substrate must be clean, dry, and free of any loose particles. The substrate must be clean, dry, and free of any loose particles.

**INSTALLATION**

Begin by unrolling the flooring and allowing it to acclimate to the room temperature for 24 hours. Begin by unrolling the flooring and allowing it to acclimate to the room temperature for 24 hours. Begin by unrolling the flooring and allowing it to acclimate to the room temperature for 24 hours. Begin by unrolling the flooring and allowing it to acclimate to the room temperature for 24 hours.

**REVERSE SIDE OF THE REGISTER**

Click-Lock system allows for a fast and easy installation. Click-Lock system allows for a fast and easy installation. Click-Lock system allows for a fast and easy installation. Click-Lock system allows for a fast and easy installation.

**MAINTENANCE**

Use a soft broom or vacuum cleaner to remove dirt and debris. Use a soft broom or vacuum cleaner to remove dirt and debris. Use a soft broom or vacuum cleaner to remove dirt and debris. Use a soft broom or vacuum cleaner to remove dirt and debris.

**LUXURY VINYL FLOORING - CLICK SYSTEM**

**LUXURY VINYL FLOORING - CLICK SYSTEM**

**LUXURY VINYL FLOORING (EIR (Embossed in Register))**

**SOLID**

**LUXURY VINYL FLOORING**

**LUXURY VINYL FLOORING - CLICK SYSTEM**

**SOLID**

**LUXURY VINYL FLOORING**

**LUXURY VINYL FLOORING - CLICK SYSTEM**

1.5mm (0.059")  
EIR (Embossed in Register)

**SOLID**

LUXURY VINYL FLOORING

EIR (Embossed in Register)

LUXURY VINYL FLOORING

EIR (Embossed in Register)

**SOLID**

LUXURY VINYL FLOORING

1.5mm (0.059")  
EIR (Embossed in Register)




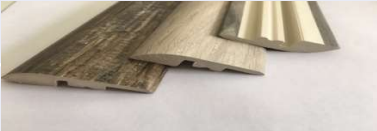

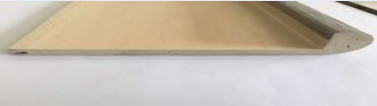


TECHICAL DATA SHEET:

---

# SOLID

LVT 6/0.5 + 1.5 EVA underlayment			
No.	Properties	Classification / Standard	Result
<b>Product Specifications</b>			
1	Size		9" x 60"
2	Built in Underlayment		1.5 mm EVA
3	Total Thickness		7.5 mm
4	Wear Layer		0.5 mm (20 mil)
5	Locking System		UNILIN
6	Installation Method	Click Installation	Uniclic
7	Surface Treatment		UV Coating
8	Staining Resistance	ISO26987	Not affected
9	Resistance to Light	ASTMF1515	<8.0 ΔE
10	DCOF	ASTM D2047	DRY - 0.48
11	Thickness Swell	ASTM F3261	Commercial Class
12	Large Ball Impact Resistance	EN 16511	≥1200 mm
13	Heat Stability / Color Fastness	ASTMF1514-03	<8.0 ΔE
14	Critical Radiant Flux	EN 13501-1	Class Bfl - s1
15	Residual Indentation	ASTM F3261	Commercial Class
16	Surface Bonding	ASTM F3261	Commercial Class
17	Thermal resistance	EN 12667:2001	0.05 ( m <sup>2</sup> .K)/W
18	Dimensional Stability	ASTM F3261	Commercial Class
19	Impact Sound Conduction	ASTM E492-09/ ISO 12354	IIC= 64 dB
20	Airborne Sound Conduction	ASTM E90-09	STC = 66dB
21	Static Load Limit	ASTM F970-07	Commercial Class

PROFILE	PICTURE
 <p data-bbox="730 480 974 516"><b>T-molding</b></p>	
 <p data-bbox="751 634 940 670"><b>Reducer</b></p>	
 <p data-bbox="720 789 1020 824"><b>Flush Stairnose</b></p>	

*Moldings (Trims) available  
For shape reference only*