



Earth

SPC CATALOGUE



5 colors
Size: 7"x48" (1220 x 182mm)
Wear layer: 12 mil (0.3mm)
Thickness: 5.5mm
Random Emboss

All colors



ARENA



DESERT



COFFEE



SNOW



ASH



ARENA

Arena 7x48 12 mil





DESERT

Desert 7x48 12 mil





COFFEE

Coffee 7x48 12 mil





SNOW



Step on Floors

Snow 7x48 12 mil





ASH


Ash 7x48 12 mil



Product Specifications

Width	Length	Thickness	Wear Layer
7"	48"	5.5mm	12 mil (0.3mm)
PC/Box	SQFT/Box	LBS/Box	
10	23.90	42.90	
Box/Pallet	SQFT/Pallet	LBS/Pallet	
50	1195.01	2233.00	

Moldings Available

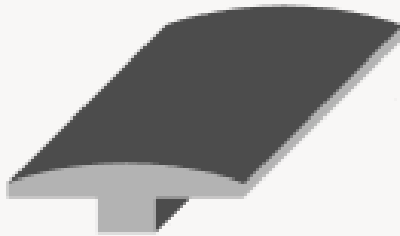

T-Molding



Reducer



Flush-Stairnose

Size: 7x48" and 9x60"
Thickness: 4mm+1.5mm EVA

Wear layer: 0.3mm (12 mil)
Texture: Random Emboss

Properties	Test Method	Result
Staining Resistance	ISO26987	Not affected
Resistance to Light	ASTM F1515	<8.0 ΔE
DCOF	ASTM D2047	DRY - 0.48
Thickness Swell	ASTM F3261	Commercial Class
Large Ball Impact Resistance	EN 16511	≥1200 mm
Heat Stability / Color Fastness	ASTM F1514-03	<8.0 ΔE
Critical Radiant Flux	EN 13501-1	Class Bfl - s1
Residual Indentation	ASTM F3261	Commercial Class
Surface Bonding	ASTM F3261	Commercial Class
Thermal resistance	EN 12667:2001	0.05 (m².K)/W
Dimensional Stability	ASTM F3261	Commercial Class
Impact Sound Conduction	ASTM E492-09/ ISO 12354	IIC= 64 dB
Airborne Sound Conduction	ASTM E90-09	STC = 66dB
Static Load Limit	ASTM F970-07	Commercial Class





Earth

SPC CATALOGUE