



Breeze

SPC CATALOGUE



Step on Floors



5 colors
Size: 7"x48" (1220 x 178mm)
Wear layer: 12 mil (0.3mm)
Thickness: 5.0 mm
Random Emboss

All colors



SEA



LAND



VALLEY



VOLCANO



SIERRA



SEA



LAND



VALLEY



VOLCANO




SIERRA

Product Specifications

Width	Length	Thickness	Wear Layer
7"	48"	5.0mm	12 mil (0.3mm)
PC/Box	SQFT/Box	LBS/Box	
12	28.05	47.08	
Box/Pallet	SQFT/Pallet	LBS/Pallet	
60	1682.99	2890.80	

Moldings Available

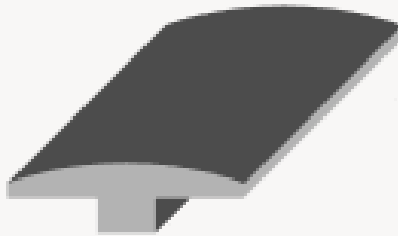

T-Molding



Reducer



Flush-Stairnose

Size: 7x48"
Thickness: 4mm+1.0mm EVA

Wear layer: 0.3mm (12 mil)
Texture: Random Emboss

Test Item	Testing Methods	Test Results
Bending Strength	EN 310	≥ 15.0 Mpa
Elastic Modulus	EN 310	≥ 3500 Mpa
Anti Scratch	EN 16094	Level 1
Density	EN 436	Core: 2100±100Wearlayer: 1200±100
Click pressure	NA	≥ 180 (N/100mm)
Square	EN 13329ISO 24342	qmax≤ 0.10mm
Click tension force	ISO 16906	≥ 110 (N/50mm)
Peeling strength	EN 431	≥ 70 (N/50mm)
Surface Scratch	ISO 1518	Weight ≥ 2500g
Scratch-resistant test	EN 16094	Rating 1-2
Impact resistance	EN 13329	≥1600mm (big ball)≥20N (small ball)
Heavy metal	DIN EN71-3	Not detected
Reaction to Fire	EN 14041:2004/AC:2006	Bfl-s1
Release of Formaldehyde	EN 14041:2004/AC:2006	E1
Emission of Pentachlorophenol	EN 14041:2004/AC:2006	<5 ppm
DCOF Dry	ANSI A326.3-2021	0.64
Thermal Resistance	EN 14041:2004/AC:2006	R: 0.01 (m2K)/W
Electrical Behavior	EN 14041:2004/AC:2006	Anti-Static
IIC	ASTM E492-22	54
STC	ASTM E90-23	52





Breeze

SPC CATALOGUE



Step on Floors